

# TECHNICAL DATA SHEET


## 45° ELBOW • E45

Used to offset the flue or chimney by 45°.

**Includes:**

- 1 Assembly band (AB)
- 1 Finishing band (FB)

K = 0.15

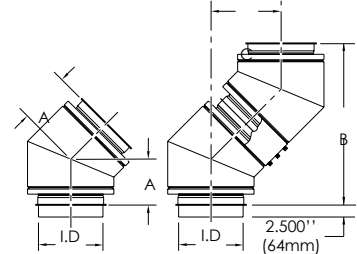

DOUBLE WALL - 2"							
I.D.		A		B		C	
in	mm	in	mm	in	mm	in	mm
6	152	7.743	197	26.435	186	10.950	278
8	203	8.157	207	27.849	192	11.536	293
10	254	8.571	218	29.263	199	12.121	308
12	305	8.985	228	30.678	206	12.707	323
14	356	9.399	239	32.092	213	13.293	338
16	406	9.814	249	33.506	220	13.879	353
18	457	10.228	260	34.920	226	14.464	367
20	508	10.642	270	36.335	233	15.050	382
22	559	11.056	281	37.749	240	15.636	397
24	610	11.471	291	39.163	247	16.222	412
26	660	11.885	302	40.577	254	16.808	427
28	711	12.299	312	41.991	260	17.393	442
30	762	12.713	323	43.406	267	17.979	457
32	813	13.127	333	44.820	274	18.565	472
34	864	13.542	344	46.234	281	19.151	486
36	914	13.956	354	47.648	288	19.737	501
38	965	14.370	365	49.062	294	20.322	516
40	1016	14.784	376	50.477	301	20.908	531
42	1067	15.198	386	51.891	308	21.494	546
44	1118	15.613	397	53.305	315	22.080	561
46	1168	16.027	407	54.719	322	22.665	576
48	1219	16.441	418	56.134	328	23.251	591

DOUBLE WALL - 4"							
I.D.		A		B		C	
in	mm	in	mm	in	mm	in	mm
6	152	8.743	222	29.849	758	12.364	314
8	203	9.257	233	31.263	794	12.950	329
10	254	9.571	243	32.678	830	13.536	344
12	305	9.985	254	34.092	866	14.121	359
14	356	10.399	264	35.506	902	14.707	374
16	406	10.814	275	36.920	938	15.293	388
18	457	11.228	285	38.920	974	15.879	403
20	508	11.642	296	39.749	1010	16.464	418
22	559	12.056	306	41.163	1046	17.050	433
24	610	12.471	317	42.577	1081	17.636	448
26	660	12.885	327	43.991	1117	18.222	463
28	711	13.299	338	45.406	1153	18.808	478
30	762	13.713	348	46.820	1189	19.393	493
32	813	14.127	359	48.234	1225	19.979	507
34	864	14.542	369	49.648	1261	20.565	522
36	914	14.956	380	51.062	1297	21.151	537
38	965	15.370	390	52.477	1333	21.737	552
40	1016	15.684	401	53.891	1369	22.322	567
42	1067	16.198	411	55.305	1405	22.908	582
44	1118	16.613	422	56.305	1441	23.494	597
46	1168	17.027	432	58.134	1477	24.080	612
48	1219	17.441	443	59.548	1513	24.665	627

**AVAILABLE FOR MODELS:**

**IPPL/IPPL2/IPPL2F/IPPL4F**

**HEPL/HEPL2**

**GDPL/GDPL2F/GDPL4F**