


TECHNICAL DATA SHEET

RAINSHEILD • RSH

Installed at the top of the chimney. It prevents rain penetration when the chimney is installed at a location subject to high wind conditions. Installation of a drain-tee cap (DC) or drain section (DS) at the base of the chimney is required for use of a rainshield. Available from 6" (152mm) to 16" (406mm) diameter.

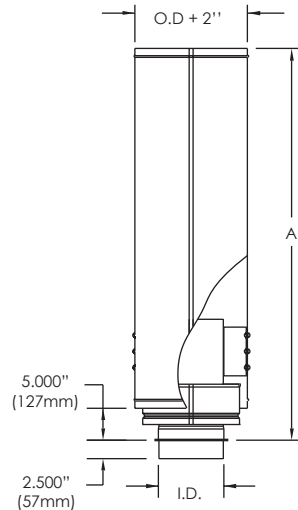

SINGLE WALL			
I.D.	A	I.D.	A
in	in	mm	mm
6	41.000	152	1041
8	47.000	203	1193
10	53.000	254	1346
12	58.000	305	1498
14	65.000	356	1615
16	72.000	406	1828

DOUBLE WALL - 2" AND 4"			
I.D.	A	I.D.	A
in	in	mm	mm
6	43.500	152	1105
8	49.500	203	1257
10	55.500	254	1410
12	61.500	305	1592
14	67.500	356	1715
16	74.500	406	1892

AVAILABLE FOR MODELS:

IPP/IPPL/IPPL2/IPPL2F/IPPL4F

HEP/HEPL/HEPL2

GDP/GDPL/GDPL2F/GDPL4F