



# TECHNICAL DATA SHEET

## STORM COLLAR • SC

Used to seal the space between the chimney and flashing. The storm collar must be sealed to the chimney with appropriate sealant. It is supplied with flashing for flat roofs of adjustable flashing.

### Includes:

1 Socket head cap screws

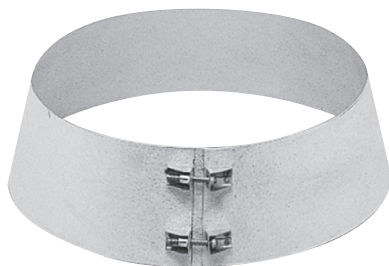

**AVAILABLE FOR MODELS:**

**IPP/IPPL/IPPL2/IPPL2F/IPPL4F**

**HEP/HEPL/HEPL2**

**GDP/GDPL/GDPL2F/GDPL4F**